

**The strapping machine
with fully automatic
application of corners**



Strapping machine
Horizontal Automatic for pallets

2904

Strapping machine Horizontal Automatic for pallets

Automatic horizontal strapping machine with corners applicator system, easy and comfortable to program.

Can be integrated into fully automated lines.


- Own manufacturing and technology using highest quality components.
- Compression system in the arch compacts load and guides the strap to the correct position.
- Mechanical tension adjustable through a holding strap system to get the highest tension.
- Aluminium head Reisopack 1900 long lasting.
- Approximate production higher than 50 pallet per hour.
- Security system under the arch with reverse engine.
- Visual signaling errors.
- Touchscreen control 5'6 inch TFT LCD.
- Able to store up to 10 different strapping programs.
- Automatic corners applicator system.

OPTIONS:

- Electronic tension.
- Strap empty alarm.
- CRC technology to perfectly reposition of the corners.
- Side compactor system.
- Motorized corners carts.
- Dual corners deposit.
- Fifth corners arm.



It allows you to select between the different stored strapping programs with pressing a button.

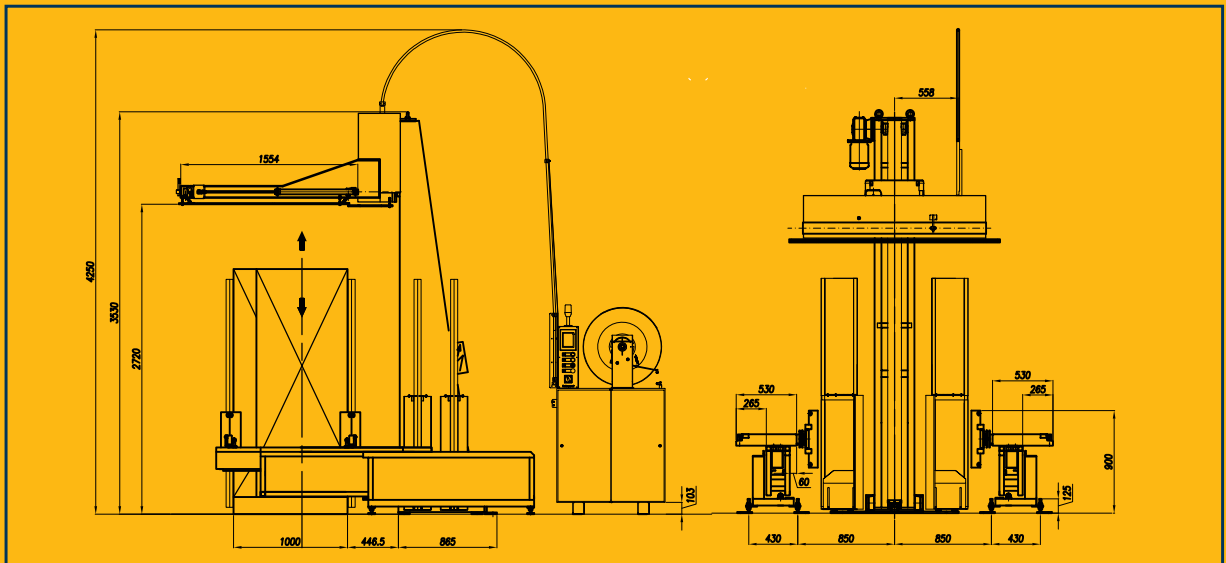

The placement of corners operation is performed quickly and accurately.



CHARACTERISTICS

- VOLTAGE: 220 V / 380 V · 50 / 60 Hz. Triphasic
- ELECT. CONSUMPTION: 2 Kw. APROX. PRODUCT.: 50 pallets / hour.
- COMPRESSED AIR PRESSURE: 6 atm.
- MACHINE DIMENSIONS: 2780 X 3240 X 4200 mm.
- MAXIMUM PALLET HEIGHT: 2650 mm.

TECHNICAL SPECIFICATIONS

- STRAP WIDTH: 8-12-15'5 mm. (Factory set).
- STRAP THICKNESS: 0,63-0,85 mm.
- HEATING SYSTEM: Electrical heating.
- Heating temperature and cooling time adjustable.
- MINIMUM STRAPPING HEIGHT: 130 mm.

07/15 Edition - We reserve the right to made any modification without prevention

Reisopack s.l.

Polígono Industrial "Z"
C/ De la Prensa, 3
08150 Parets del Vallès (Spain)

Tel. 902 153 448 - Fax 935 624 186
http://www.reisopack.com
E-mail: reiso@reisopack.com

Customer service: ☎ (+34) 935 735 340